


SUBMARINE THERMOMETERS



THERMOWELL DIMENSIONS

3/4"-28" Female Thread (Internal)

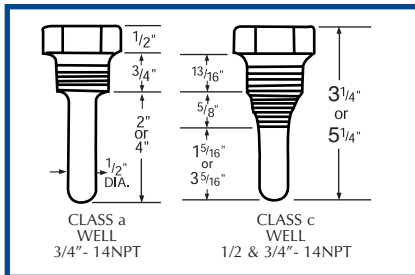

- 5" Scale Size.
- V-Shaped aluminum scale with black figures.
- Lens front, red liquid filled tube for 2" stem.
- Lens front, blue liquid filled tube for 4" stem.
- Gray ABS case.
- Glass face (window) to exclude dirt and dust.
- Available with:
 - 2" nominal stem length for 3 1/4" OA socket.
 - 4" nominal stem length for 5 1/4" OA socket.

CATALOG NUMBERS

SCALE SIZE	STEM LENGTHS	
	2"	4"
STRAIGHT	140GS	140K
90° Back Angle	141GS	141K


STANDARD TEMPERATURE RANGES

DUAL SCALE (Both °F and °C)
 -40/110F (2° Div.) and -40/40C (2° Div.)
 20/180F (2° Div.) and -6/82C (1° Div.)
 30/240F (2° Div.) and 0/114C (2° Div.)
 50/400F (5° Div.) and 10/200C (2° Div.)

WELL CLASS	THERMOMETER STEM LENGTH	WELL LENGTH (overall)	CATALOG NO.	
			BRASS	304 ST ST
a	2" 4"	3 1/4" 5 1/4"	*	W3G1 W5G1
c	2" 4"	3 1/4" 5 1/4"	W3B3 W5B3	W3G3 W5G3

*Brass wells only available in Class C

SUPER ECONOMY THERMOMETERS

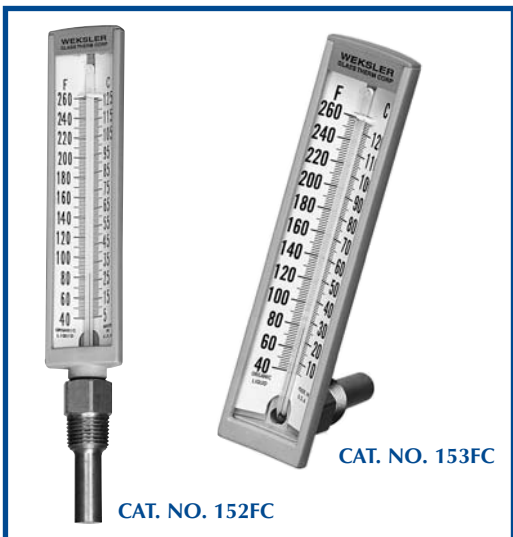

- Range 40 to 260° F and C.
- Gray ABS case.
- No glass face (window).
- Lens front red liquid filled tube.
- V-shaped aluminum scale, black figures and graduations on white background.
- Complete with 1/2" NPT brass well, 2" nominal length.

CATALOG NUMBERS

FORM	2" STEM
STRAIGHT	152FC
90° Back Angle	153FC